




# NTPT NTK BEARINGS CO.,LTD.

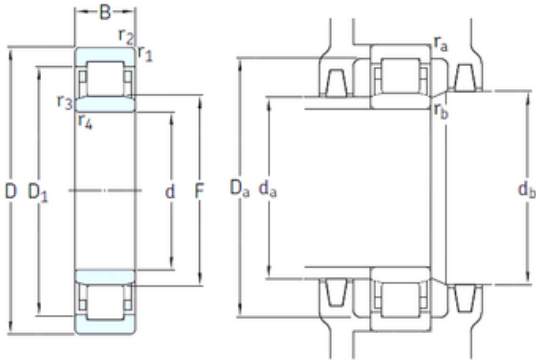

## NU1008ML/Hybrid Cylindrical Roller Bearings

Bearing No. NU1008ML/Hybrid

NU1008ML/Hybrid Bearing 2D drawings and 3D CAD models

Size	40x68x15 mm
Bore Diameter	40 mm
Outer Diameter	68 mm
Width	15 mm
d	40 mm
D	68 mm
B	15 mm
C	15 mm
r1 min.	1 mm
r2 min.	1 mm
r3 min.	0,6 mm
r4 min.	0,6 mm
D1	57,6 mm
F	47 mm
da min.	43,2 mm
da max	45 mm
Da max.	63,4 mm
db min	49 mm
ra max.	1 mm
rb max.	0,6 mm
S	2,4 mm
Weight	0,21 Kg
Basic dynamic load rating (C)	25,5 kN
Basic static load rating (C0)	26,5 kN
Fatigue load limit (Pu)	3,35



## NTPT NTK BEARINGS CO.,LTD.

Reference speed	12000 r/min
Limiting speed	18000 r/min